

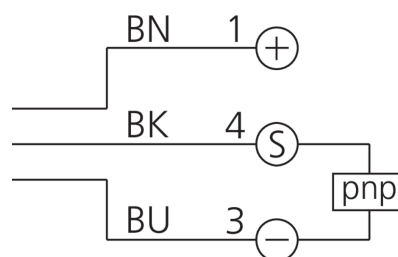


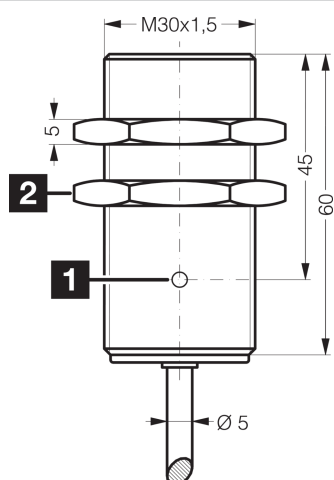

200379
DCC 30 M 22 PSLK
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

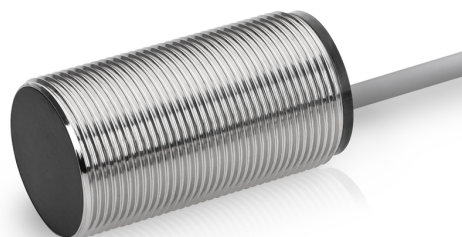

1) LED

2) Width over flats 36 mm

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V

Mechanical features

Installation type	quasi-flush
Thread	M30 x 1.5
Housing length	60 mm
Housing material	Brass (chromium-plated)
Material of cable	PVC

Certifications, approvals

Protection class	III, operation on protective low voltage
Approvals	UL

General features

Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	extremely high operating distance



200379
DCC 30 M 22 PSLK
Inductive proximity sensor

Technical data (typ.)		+20°C, 24 V DC
Product series		INE Industrial
Functional scope		
Scope of delivery		Sensor, 2 x M30 nuts
Output, input, interface		
Switching output		pnp, 200 mA, NO
Voltage drop (max.)		2 V (200 mA)
Detection range, measuring range, tolerance limits		
Switching distance (SN)		22 mm
Standardized measuring plate		66 x 66 x 1 mm
Switching hysteresis (max.)		3 ... 15 %
Time behavior		
Switching frequency		200 Hz
Ambient conditions		
Ambient temperature during operation		-25 ... +70 °C
Protection type		IP 67
Electrical connection		
Connection		Cable, 2.0 m (flying leads)
More information / accessories		https://www.di-soric.com/200379