


3521600. Torson 4-polig
Torson 4-pole
Torson quadrupolaire

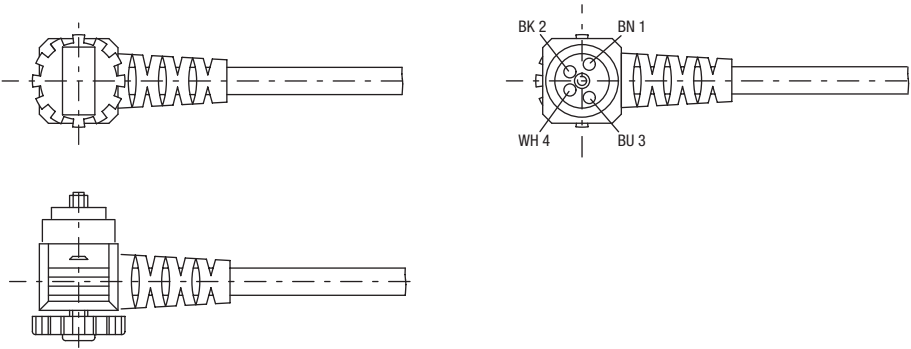

3521600.	Kabellänge 1 = 5 m ± 60 mm 2 = 10 m ± 80 mm	Cable length 1 = 5 m ± 60 mm 2 = 10 m ± 80 mm	Longueur de câble 1 = 5 m ± 60 mm 2 = 10 m ± 80 mm
	Kabelmaterial PUR 4x0,25 mm ² hochflexibel	Cable material PUR 4x0,25 mm ² , highly flexible	Matériau de câble PUR 4x0,25 mm ² haute flexibilité

Typen Nr. type no. référence	Schutzart protection class protection	Temperaturbereich temperature range plage de température	Verschmutzungsgrad contamination class degré de pollution	Betriebsspannung operating voltage tension d'alimentation	Betriebsstrom operating current courant d'alimentation
3521600.	IP65	-15...+80 °C	3	max. 60 V AC / 75 V DC	max. 4 A