




Technical Data - Electrical Ratings


Voltage Supply	24 VDC
Signal Type	Continuous
Light Colors	Red, Green *
Power Consumption	0,7W
Connection	Cable, M12 Connector
Buzzer Output	No Buzzer
Buzzer Tone Type	No Buzzer
Dimensions	50 x 50 x 49 mm
Weight Approx	65g
Protection	IP65 **
Body Material	ABS
Mounting	Panel Mount With M32 Lock Nut
Luminous Source	LED
Lens Material	Polycarbonate
Temperature Range	-20°C to +50° C

* Inquire for other colors
** Inquire for higher grades

Technical Drawings

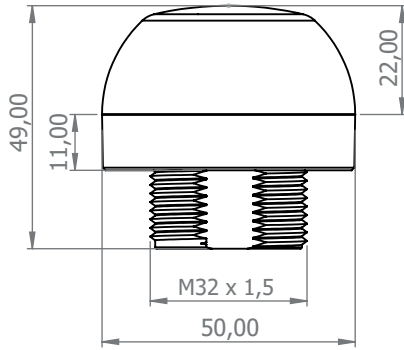

24 With Cable

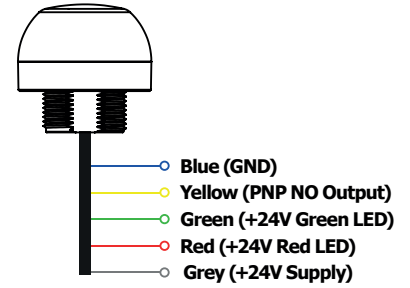

Code Key

İL - XPL50 - TY - Q12

MOUNTING TYPE

PL : Panel Mount With M32 Lock Nut

BODY

50 : Q50

INPUT TYPE

T : Capacitive Touch

CONNECTION

Blank : 1 Meter Cable
Q12 : 5 Pin M12 Male Connector

SWITCH TYPE

Y : Momentary Action
K : Latch Action