




Technical Data - Electrical Ratings

Voltage Supply	24 VDC
Signal Type	Continuous
Light Colors	Red, Green *
Power Consumption	0,7W
Connection	M12 Connector
Buzzer Output	No Buzzer
Buzzer Tone Type	No Buzzer
Dimensions	50 x 50 x 62 mm
Weight Approx	70g
Protection	IP65 **
Body Material	ABS
Mounting	Panel Mount With M32 Lock Nut
Luminous Source	LED
Lens Material	Polycarbonate
Temperature Range	-20°C to +50° C


* Inquire for other colors
** Inquire for higher grades

Technical Drawings

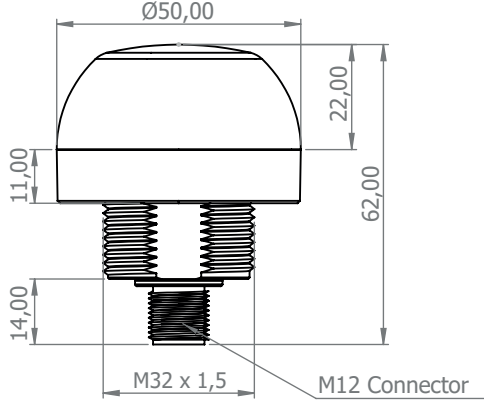

Connections

M12 Male Connector



- | | | |
|----|-------|---------------|
| 1: | Brown | +24V Supply |
| 2: | White | Red LED |
| 3: | Blue | GND |
| 4: | Black | PNP NO Output |
| 5: | Grey | Green LED |

Code Key

İL - XPL50 - TY - Q12

MOUNTING TYPE

PL : Panel Mount With M32 Lock Nut

BODY

50 : Q50

INPUT TYPE

T : Capacitive Touch

CONNECTION

Blank : 1 Meter Cable
Q12 : 5 Pin M12 Male Connector

SWITCH TYPE

Y : Momentary Action
K : Latch Action