





### Technical Data - Electrical Ratings

|                                      |                                                                                    |
|--------------------------------------|------------------------------------------------------------------------------------|
| Voltage Supply                       | 12-24VAC/DC, 5VDC, 48VDC, 110-220VAC                                               |
| Signal Type                          | Multi (Continuous/Flashing/Strobe/Rotate)                                          |
| Light Colors                         | Red, Yellow, Green, Blue, White, Amber                                             |
| Power Consumption                    | Light:3,2W Bzr:0,5W                                                                |
| Connection                           | Cable, Car Outlet, USB Cable                                                       |
| Buzzer Output                        | 92 dB @ 1 meter (B Type)<br>110 dB @ 1 meter (Optional) (BH Type)                  |
| Buzzer Tone Type                     | Pulse (B Type)<br>7 Melodies (BH Type)                                             |
| Battery/Operation Life (Strobe Mode) | 2000mAh, Red: LiFePO4, other colors: Li-Ion<br>Red : 12 hrs, other colors : 20 hrs |
| Dimensions                           | 140 x 140 x 149mm                                                                  |
| Weight Approx                        | Lamp: 305g, Cage: 225g                                                             |
| Protection                           | IP65                                                                               |
| Body Material                        | ABS                                                                                |
| Mounting                             | Screw + Base Mounting                                                              |
| Luminous Source                      | LED                                                                                |
| Lens Material                        | Polycarbonate                                                                      |
| Temperature Range                    | -20°C to +50°C                                                                     |

### Technical Drawings

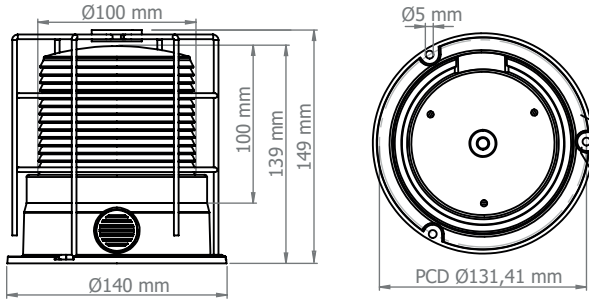

### Connections

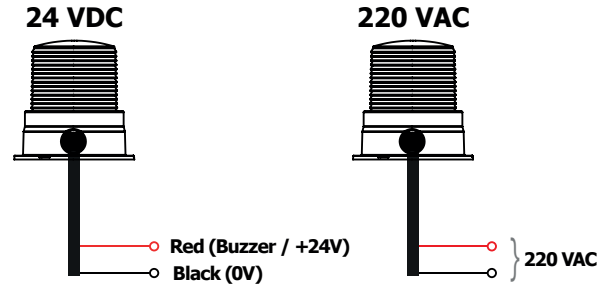

### Code Key

**İL - XMB - T10 - 24K - PL - MP**

#### CONNECTION TYPE

- X** : Cable
- XUSB** : USB Cable (Only with 5VDC Supply)
- XJ** : Car Outlet (With 5VDC, 12-24VAC/VDC Supply)

#### SIGNAL TYPE

- S** : Continuous
- F** : Flashing
- D** : Rotate
- Ç** : Strobe
- M** : Multi (Continuous / Flashing / Strobe / Rotate)

#### BUZZER

- Blank** : No Buzzer
- B** : With 92 dB Buzzer
- BH** : With 110 dB Buzzer

\*Buzzers can be used except for 5V powered products.

#### MOUNTING TYPE

- T** : Base Mounting
- MM** : Magnetic Mounting

#### PROTECTION OPTION

- Blank** : No Metal Protection
- MP** : With Metal Protection

#### BATTERY OPTION

- Blank** : No Battery
- PL** : With Battery

#### LENS COLOR

- K** : Red
- S** : Yellow
- Y** : Green
- M** : Blue
- B** : White
- T** : Amber

#### SUPPLY VOLTAGE

- 5** : 5 VDC
- 12** : 12 VAC/VDC
- 24** : 24 VAC/VDC
- 48** : 48 VDC
- 11** : 110 VAC
- 22** : 220 VAC

#### BODY

- 10** : Q100