




### Technical Data - Electrical Ratings

|                   |                                      |
|-------------------|--------------------------------------|
| Voltage Supply    | 12/24 VAC-VDC / 48 VDC / 110-220 VAC |
| Signal Type       | Multi (Continuous / Flashing)        |
| Light Colors      | Red, Yellow, Green *                 |
| Power Consumption | Light:2,4W Bzr:0,5W                  |
| Connection        | Cable                                |
| Buzzer Output     | 92 dB @ 1 Meter                      |
| Buzzer Tone Type  | Pulse                                |
| Dimensions        | 75 x 75 x 147 mm                     |
| Weight Approx     | 175g                                 |
| Protection        | IP65                                 |
| Body Material     | ABS                                  |
| Mounting          | Base Mount                           |
| Luminous Source   | LED                                  |
| Lens Material     | Polycarbonate                        |
| Temperature Range | -20°C to +50° C                      |

\* Inquire for other modes

### Technical Drawings

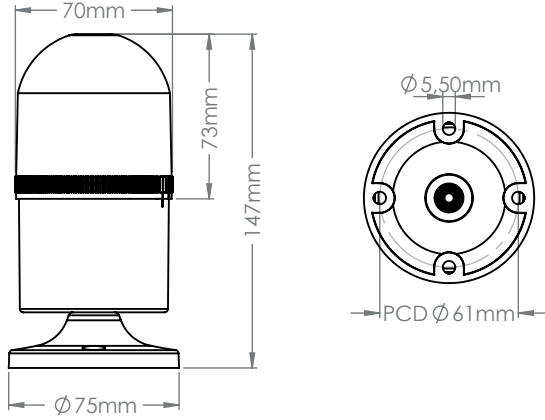


### Connections

#### 24 VDC



#### 220 VAC

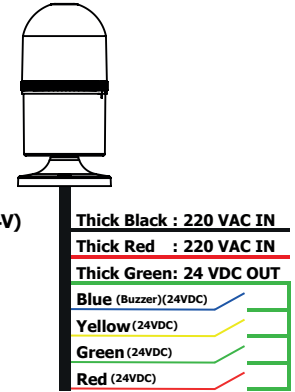

### Code Key

### İL - XMB - T7K - 243

#### SIGNAL TYPE

**S** : Continuous  
**F** : Flashing  
**M** : Multi (Continuous/Flashing/Strobe)

#### BUZZER

**Blank** : No Buzzer  
**B** : With Buzzer

#### MOUNTING TYPE

**T** : Screw + Base Mounting

#### BODY

**7** : Q70

#### LENS COLOR

**3** : White( ● ● ● )

#### SUPPLY VOLTAGE

**12** : 12 VAC/VDC  
**24** : 24 VAC/VDC  
**48** : 48 VDC  
**11** : 110 VAC  
**22** : 220 VAC

#### DOME LENS