



Laser diffuse sensor with background suppression

-

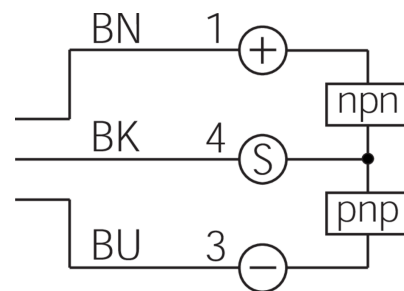

BU: blue

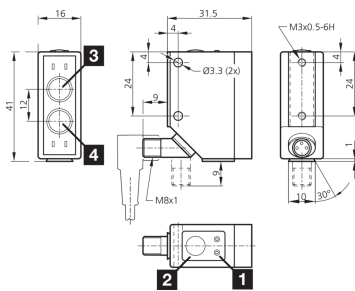

+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com

**205014****LHT 41 M 0.2 G3-T3****Laser diffuse sensor with background suppression**

Technical data (typ.)		+20°C, 24 V DC
Shock/vibration load		30 g, 10 ... 55 Hz / 0.5 mm
Ambient temperature during operation		0 ... +50 °C
Protection type		IP 67
Connection		Connector, M8, 3-pin
Connection cable		TK ...
More information / accessories		https://www.di-soric.com/205014