


Technical Data - Electrical Ratings

Voltage Supply	12-24 VDC / 110-220 VAC
Signal Type	Multi (Continuous/Flashing/Strobe)
Light Colors	Red(ICAO Standard) *
Power Consumption	2W
Connection	Cable
Photocell	Yes
Alarm Output	Yes
Dimensions	94 x 255 x 177 mm
Weight Approx	1720g
Protection	IP65
Body Material	Main Body : Steel Light Source Body : ABS
Mounting	Pipe Mounting **
Luminous Source	LED
Luminous Intensity	40 cd
Lens Material	Polycarbonate
Temperature Range	-20˚C to +50˚C


* Inquire for other colors
* Inquire for other mounting options

Technical Drawings

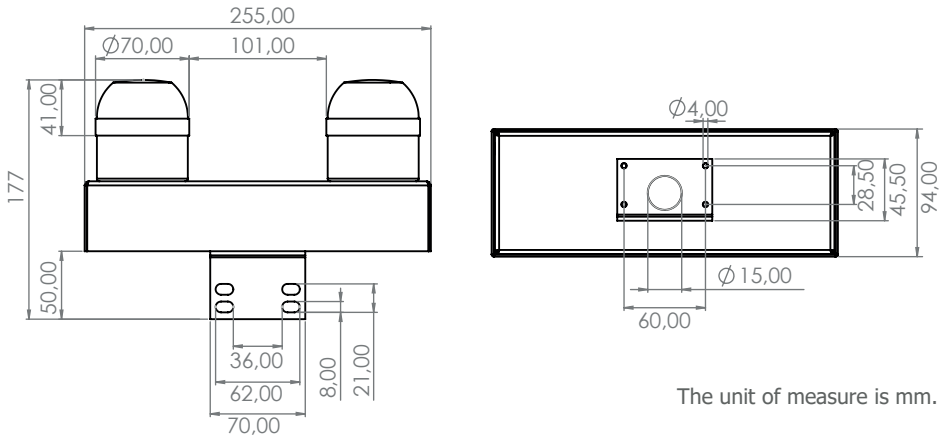

The unit of measure is mm.

Connections



1. 12-24V/220V
2. GND/220V
3. Dry contact alarm output
4. Dry contact alarm output

Code Key

İL - XACF - B2R - 24K

AIRCRAFT WARNING LIGHT

LUMINOUS INTENSITY
B : ICAO Type B (40 cd)

INTERNAL BACKUP
2 : With Backup

LIGHT BODY
R : Body of R6 Warning Light

LIGHT COLOR
K : Red (ICAO Standard)

SUPPLY VOLTAGE
12 : 12 VDC
24 : 24 VDC
11 : 110 VAC
22 : 220 VAC