




Technical Data - Electrical Ratings


Voltage Supply	12/24 VAC-VDC / 110-220 VAC
Power Consumption	10W
Connection	Cable
Buzzer Output	120 dB @ 1 Meter
Buzzer Tone Type	7 Melodies
Dimensions	145 x 145 x 214 mm
Weight Approx	1.6 kg
Protection	IP65
Body Material	Aluminum
Mounting	Wall Mount
Temperature Range	-20°C to +50°C

Technical Drawings

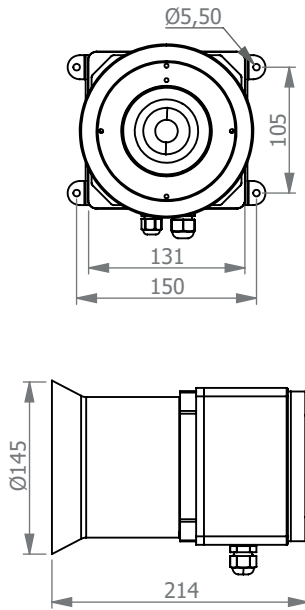

Connections

12/24 VAC-VDC




Red (Buzzer / $\pm 24V$)
Black (0V)

Blue : Melody Selection Cable

Yellow : Melody 1
Green : Melody 2
White : Melody 3
Pink : Melody 4
Gray : Melody 5
Brown : Melody 6
Red : Melody 7

110-220 VAC



220 VAC

Blue : Melody Selection Cable

Yellow : Melody 1
Green : Melody 2
White : Melody 3
Pink : Melody 4
Gray : Melody 5
Brown : Melody 6
Red : Melody 7

! If melody selection cables are energized, the product will be out of warranty.

Code Key

İL - XHD - 24B

HD SERIES

SPEAKER

SUPPLY VOLTAGE

12 : 12 VAC/VDC
24 : 24 VAC/VDC
11 : 110 VAC
22 : 220 VAC

Blank : No Speaker
B : With Horn Speaker
B1 : With Square Speaker